

# LAYOUT NOTES



- SEE GENERAL NOTES ON COVER SHEET L-1.
- SEE SPECIAL PROVISIONS FOR ADDITIONAL INFORMATION AND REQUIREMENTS.
- WRITTEN DIMENSIONS SHALL TAKE PRECEDENT OVER SCALED DIMENSIONS. ALL FIELD ADJUSTMENTS MUST BE APPROVED BY THE PARK CONSTRUCTION INSPECTOR PRIOR TO INSTALLATION. ALL DIMENSIONS ARE TO INSIDE EDGE OF CONCRETE FLATWORK/MOWSTRIP, FACE OF CURB, OR CENTER POINT OF RADIUS. CONTRACTOR SHALL PROVIDE SMOOTH TRANSITIONS BETWEEN POINT STATIONS ALONG WALKWAY.
- VERIFY EXISTING CONDITIONS BEFORE BEGINNING WORK. NOTIFY PARK CONSTRUCTION INSPECTOR IF THERE ARE SUBSTANTIAL DISCREPANCIES.
- NEW CONCRETE FLATWORK SHALL MEET GRADE OF EXISTING CONCRETE FLATWORK OR ASPHALT PAVING. WHERE NEW CONCRETE IS PLACED ADJACENT TO CURBS OR EXISTING CONCRETE PAVING, A CONTINUOUS EXPANSION JOINT SHALL BE INSTALLED BETWEEN THE NEW CONCRETE FLATWORK & CURBS, EXISTING CONCRETE FLATWORK, OR EXISTING ASPHALT PAVING. ANY NEW CONCRETE WALKWAY SHALL BE STAKED AND REVIEWED BY LANDSCAPE ARCHITECT BEFORE CONCRETE IS TO BE POURED.
- SLEEVING SHALL BE INSTALLED PRIOR TO PLACING CONCRETE WORK.
- ALL MATERIALS & FINISHES SHALL BE AS PER DRAWINGS. REFER TO SPECIFICATIONS & DETAILS FOR ADDITIONAL INFORMATION. SOME MATERIALS MAY REQUIRE SEVERAL WEEKS OR MONTHS ORDER LEAD TIME. CONTRACTOR IS RESPONSIBLE FOR DETERMINING ANY & ALL ORDERING LEAD TIMES & PROVIDING REQUIRED MATERIALS AT THE PROJECT SITE IN A TIMELY MANNER. NO UNAPPROVED SUBSTITUTIONS WILL BE ALLOWED. CONTACT THE LANDSCAPE ARCHITECT IMMEDIATELY IF A SPECIFIED MATERIAL IS NOT AVAILABLE.
- EXPANSION JOINTS IF NOT SHOWN ON THE PLANS SHALL BE INSTALLED AT 20' OR 24' +/- O.C. IN WALKWAYS, OTHER AREAS EXPANSION JOINTS TO BE PLACED AS SHOWN ON PLANS.
- SCORE JOINTS TO BE SPACED AS SHOWN ON PLANS.

## KEY NOTES (K.N.)

- 6' HIGH CHAIN LINK FENCING PER DETAIL 6/L10.
- DOUBLE 10' WIDE MAINTENANCE GATE, PER DETAIL 2/L11.
- CONCRETE PAVING, PER DETAIL 1/L10.
- 4' WIDE X 6' TALL DOG PARK ENTRY GATES, PER DETAIL 7/L10.
- DEDICATION MASONRY WALL, REFER TO DETAIL 1/L11.
- REFER TO ENLARGEMENT PLAN FOR MEASUREMENTS AND ADDITIONAL DETAIL.
- NEW SHRUB PLANTER AREA.
- 12" CONCRETE MOW CURB UNDER FENCING (ADDITIVE ALTERNATE), REFER TO DETAIL 4/L10.
- CONCRETE SCORES JOINT
- 6' CHAIN LINK VINYL COATED CHAIN LINK FENCING
- SMALL DOG PARK SIGN, REFER TO DETAIL 7/L9
- LARGE DOG PARK SIGN, REFER TO DETAIL 7/L9
- DRAIN INLET REFER TO DETAIL 8/L10
- TYPE B DROP INLET ROLLED CURB, REFER TO DETAIL 9/L10.
- BIOSWALE REFER TO DETAIL 10/L10
- NEW WALKWAY CONCRETE PAVING
- REPLACED ROLLED CURB & GUTTER PER STANDARD DETAIL T-11
- NEW ASPHALT PAVING AROUND NEW DRAINAGE INLET.

## EQUIPMENT KEY NOTES (E.K.N.)


- A DRINKING FOUNTAIN, BY MOST DEPENDABLE FOUNTAINS, MODEL 440 9M WITH OPTIONAL PET FOUNTAIN. COLOR GREEN.

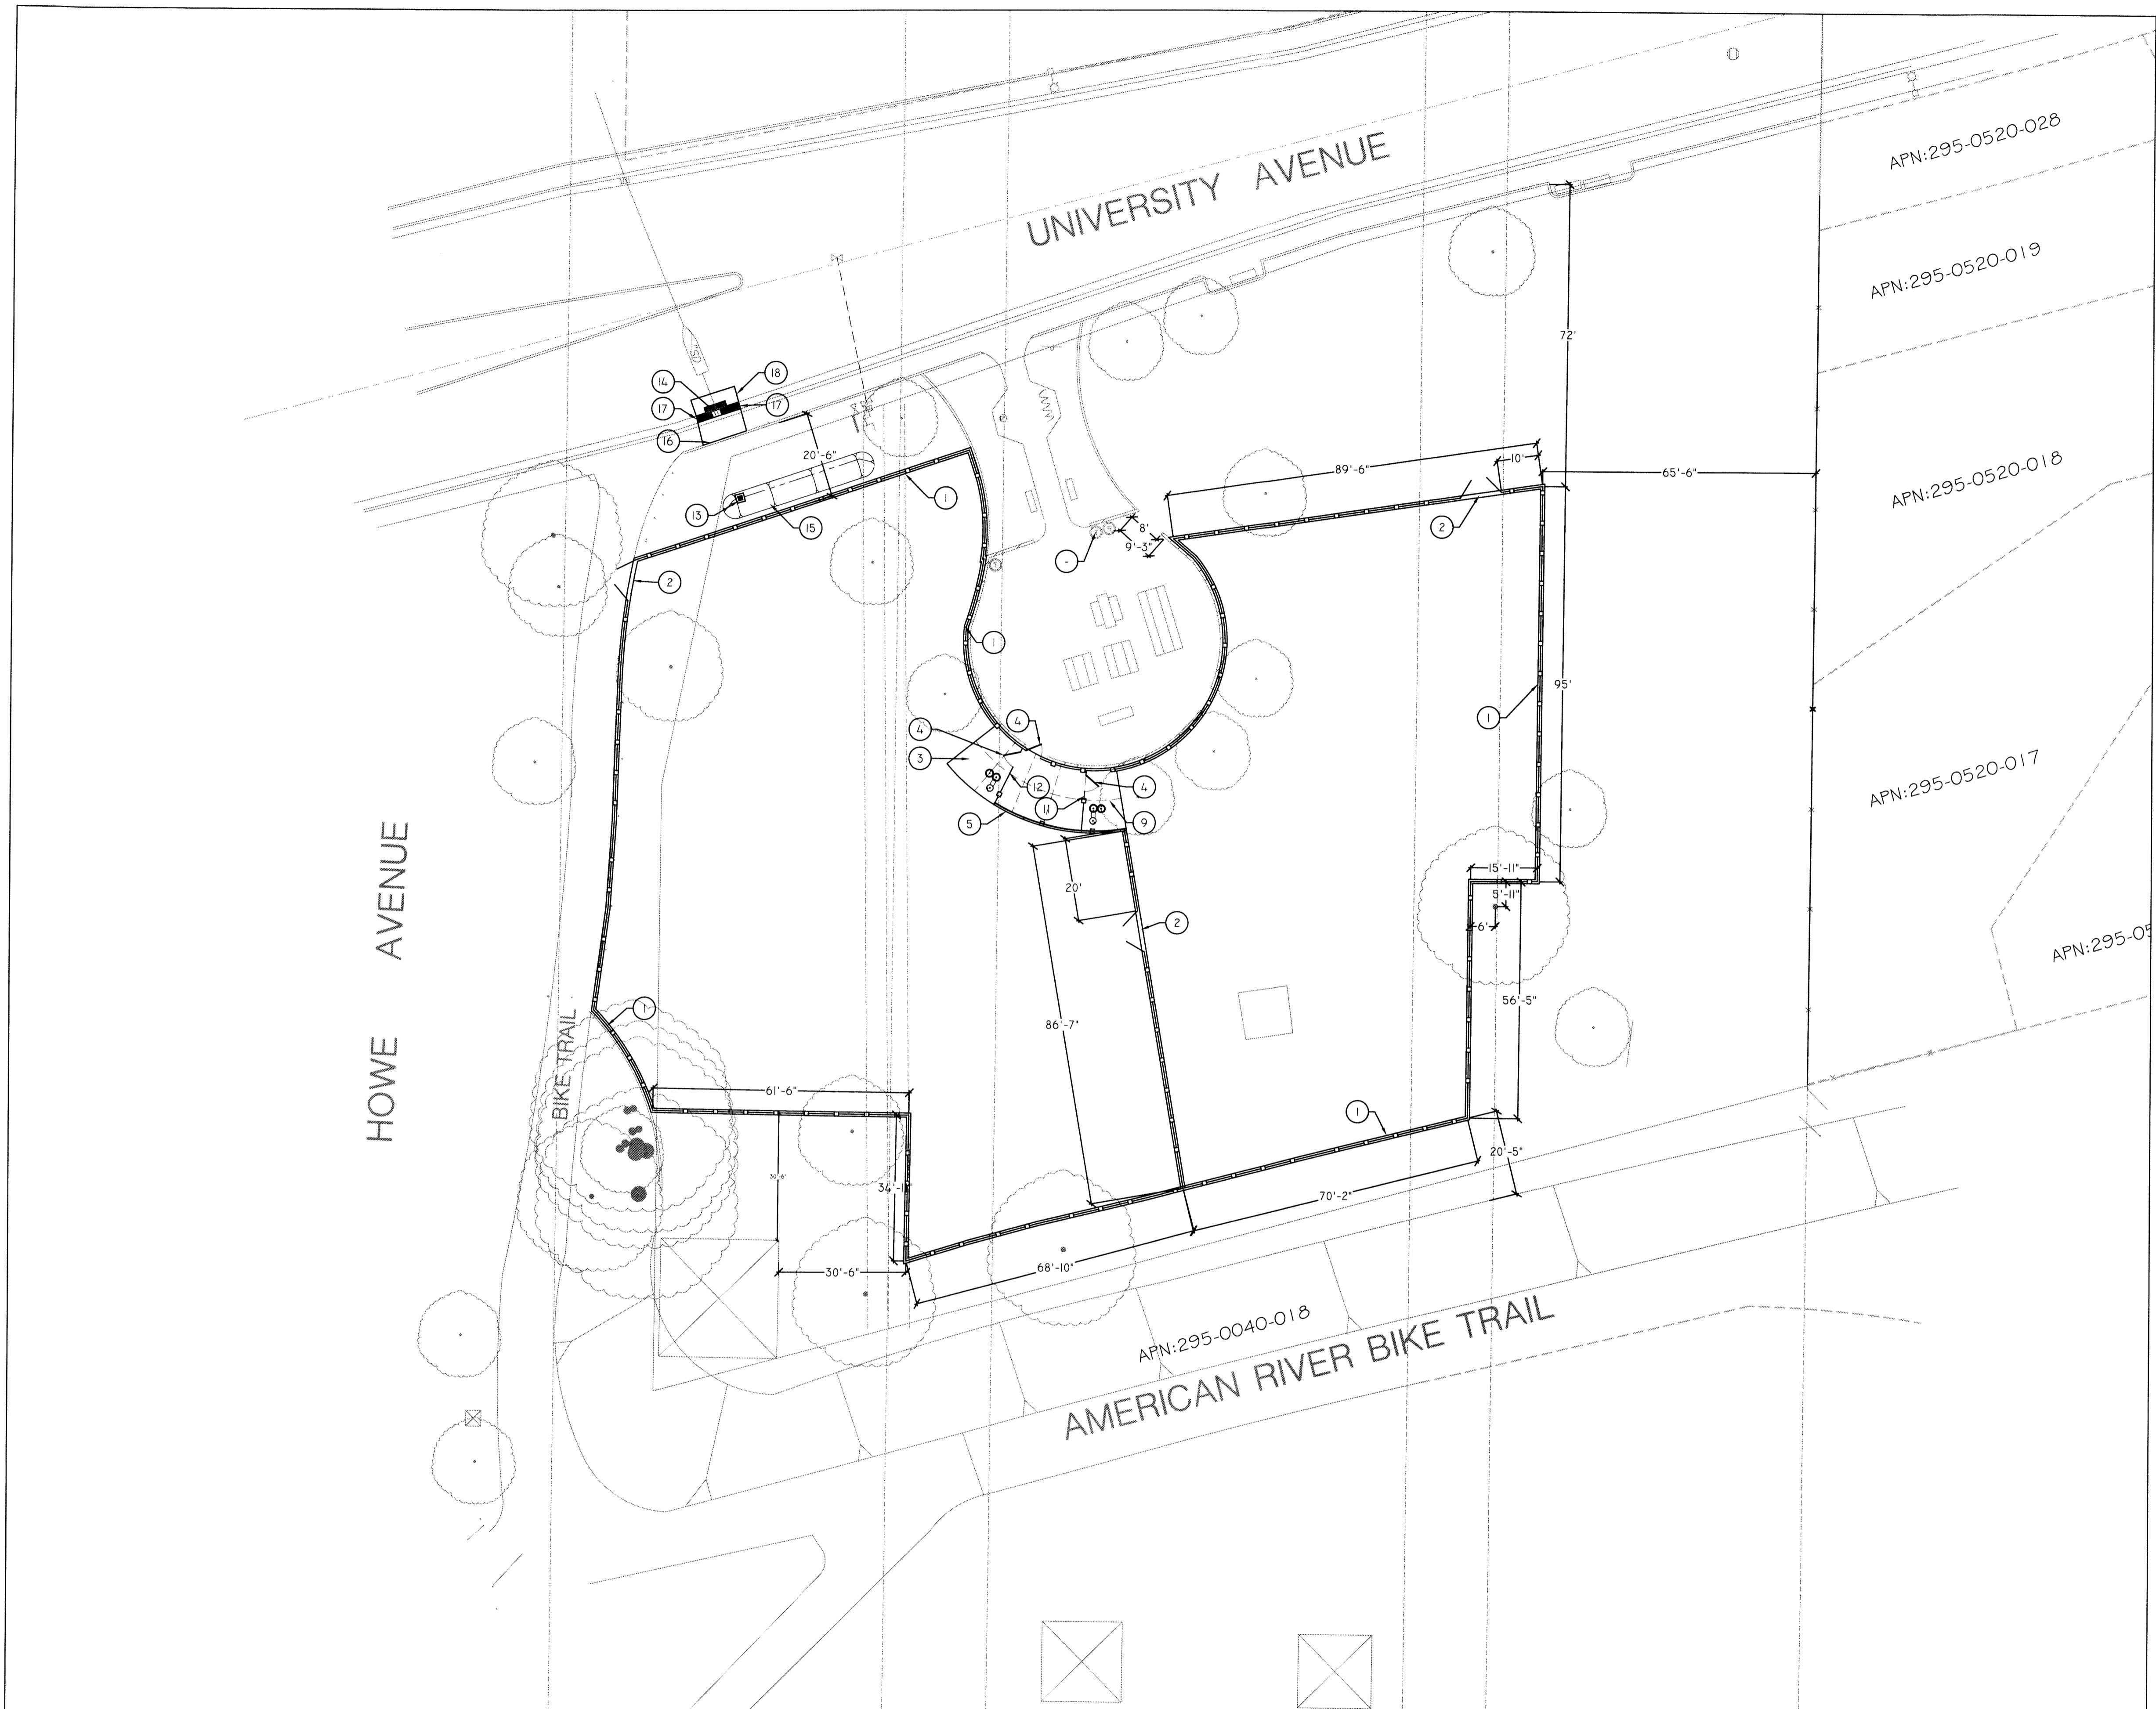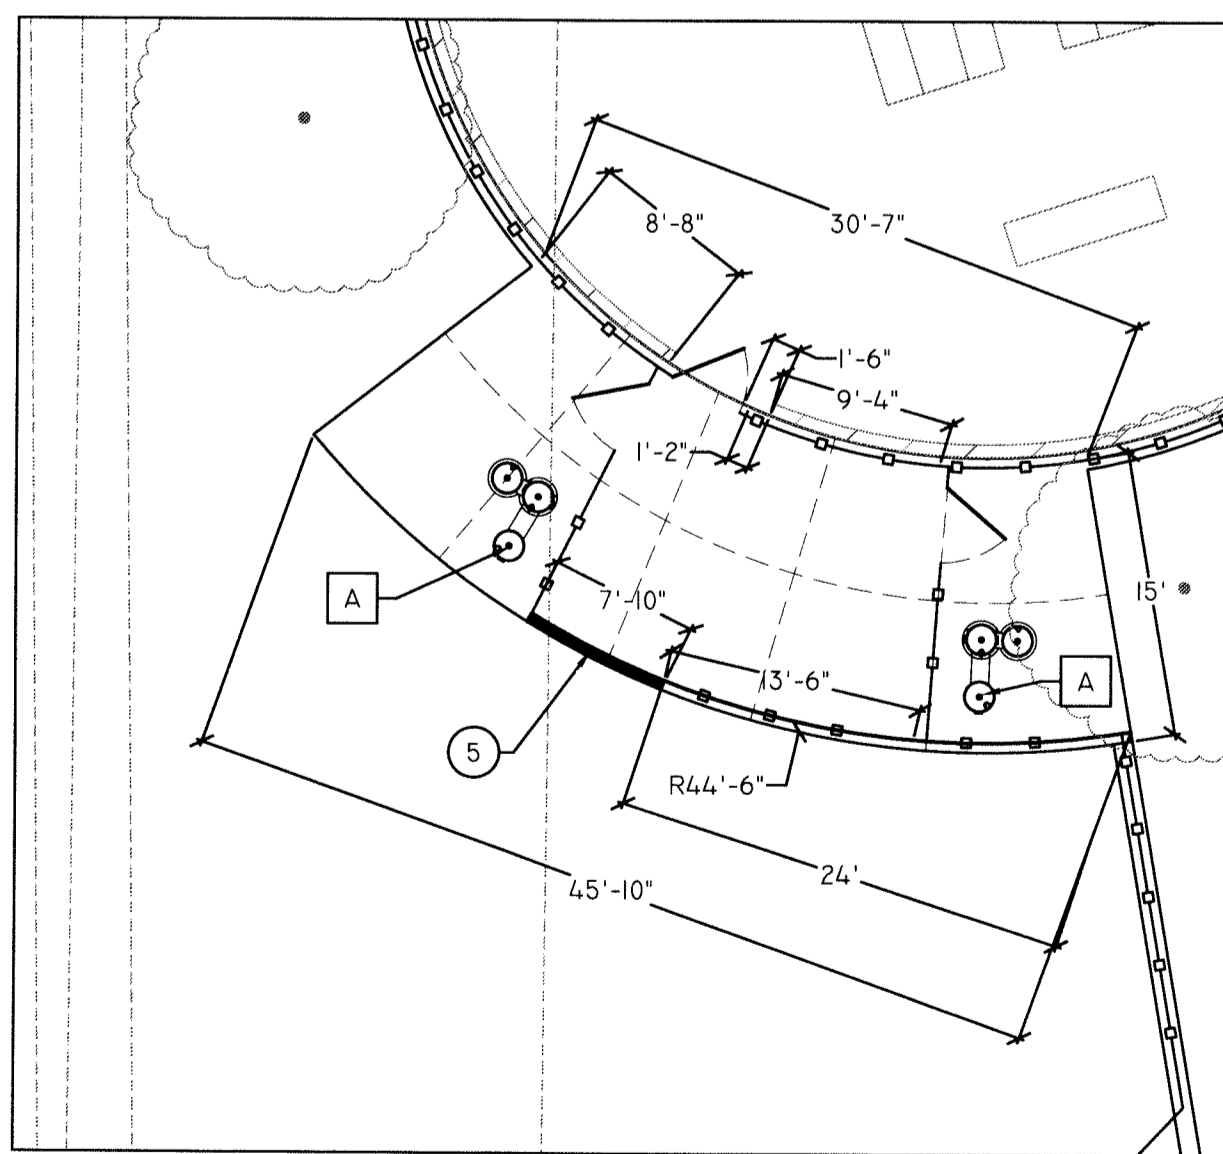

SACRAMENTO  
Parks and Recreation  
PARK PLANNING & DEVELOPMENT SERVICES  
LANDSCAPE ARCHITECTURE SECTION  
915 I STREET, SACRAMENTO, CA 95814

UNIVERSITY PARK  
DOG PARK CONCEPT PLAN  
LAYOUT PLAN

LANDSCAPE ARCHITECT  
TIN WAH WONG  
DESIGN BY/DRAWN BY  
JEFF NITKA  
CAD FILE  
DATE DEC. 8, 2015  
SCALE REFER TO PLAN  
P. N. T. B. D.  
REVISIONS

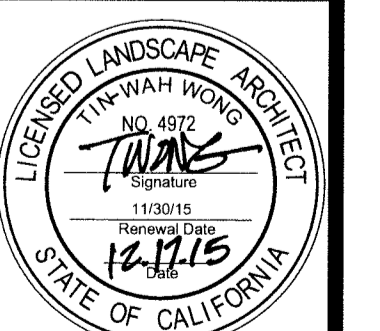

SHEET NO.  
L6